


STICK ON LEAD CAME



ALL PACK IN 6 FTS (1.82 M) LONG BOX . NET 45 LBS (20.41 KGS)

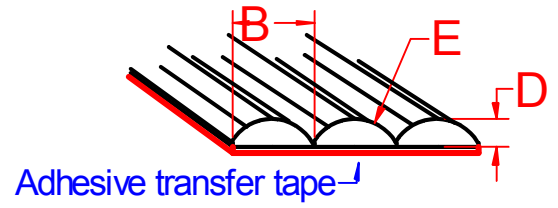

STICK ON LEAD CAMES

Name of Product	Channel " A "	Face " B "	Width " C "	Channel Depth " D "	Radius " E "	Strips per 45 lb box
SOL-316		0.176X6		0.082	0.084	26
SOL-732		0.217X5		0.085	0.116	25
SOL-250		0.250X4		0.085	0.142	24
SOL-350		0.326X3		0.120	0.197	21

1 inch = 1.000 (decimal)

All dimensions in decimals

CONVERSION

Fraction	Decimal	mm
1/64	0.0156	0.396
1/32	0.0312	0.793
3/64	0.0468	1.190
1/16	0.0625	1.587
5/64	0.0781	1.984
3/32	0.0937	2.381
7/64	0.1093	2.778
1/8	0.1250	3.175
9/64	0.1406	3.571
5/32	0.1562	3.968
11/64	0.1718	4.365
3/16	0.1875	4.762
13/64	0.2031	5.159
7/32	0.2187	5.556
15/64	0.2343	5.953
1/4	0.2500	6.350
17/64	0.2656	6.746
9/32	0.2812	7.143
19/64	0.2968	7.540
5/16	0.3125	7.937
21/64	0.3281	8.334
11/32	0.3437	8.731

CONVERSION

Fraction	Decimal	mm
23/65	0.3593	9.128
3/8	0.3750	9.525
25/64	0.3906	9.921
13/32	0.4062	10.318
27/64	0.4218	10.715
7/16	0.4375	11.112
29/64	0.4531	11.509
15/32	0.4687	11.906
31/64	0.4843	12.303
1/2	0.5000	12.700
33/64	0.5156	13.096
17/32	0.5312	13.493
35/64	0.5468	13.890
9/16	0.5625	14.287
37/64	0.5781	14.684
19/32	0.5937	15.081
39/64	0.6093	15.478
5/8	0.6250	15.875
41/64	0.6406	16.271
21/32	0.6562	16.668
43/64	0.6718	17.065
11/16	0.6875	17.462

CONVERSION

Fraction	Decimal	mm
45/64	0.7031	17.859
23/32	0.7187	18.256
47/64	0.7343	18.653
3/4	0.7500	19.050
49/64	0.7656	19.446
25/32	0.7812	19.843
51/64	0.7968	20.240
13/16	0.8125	20.637
53/64	0.8281	21.034
27/32	0.8437	21.431
55/64	0.8593	21.828
27/32	0.8437	21.431
55/64	0.8593	21.828
7/8	0.8750	22.225
57/64	0.8906	22.621
29/32	0.9062	23.018
59/64	0.9218	23.415
15/16	0.9375	23.812
61/64	0.9531	24.209
31/32	0.9687	24.606
63/64	0.9843	25.003
1"	1.0000	25.400